

XECHO i3200 - 2202

Eco Solvent Printer (with two I3200-E1 print heads)



ONYX
RIP Partner

C M Y K

Two I3200-E1 Heads



* 2m Two I3200-E1 Print Heads Speed

360x2400dpi - 4pass	37 m ² /h
720x1800dpi - 6pass	19 m ² /h
720x2400dpi - 8pass	10 m ² /h

Air suction intelligent dust removal system

The air suction system and intelligent dust removal, which can eliminate the ink fog generated in the printing process, restore the authenticity of the prints, prolong the print head service life, and increase the durability of the machine to the greatest extent.

AI Voice dialogue


Grando GD2002s has AI voice recognition functions: printer on/off control, light status control, and fan status control. In addition, our GD2002s also has a low-ink alarm function and a waste ink removal alarm.

Remote control system


Sitting at home or in the office, we can remotely control our devices through a mobile phone. (Switch on the printer with just one click through the remote control menu.

• Technical Specifications


Model	GD-2002S	
Print Head	Two I3200-E1 Print Heads	
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	2030 (mm)
	Thickness	Maximum 39.3 mil(1 mm)
	Weight	220.5 lb.(100 kg)
Printing Width	2000 (mm)	
Ink Cartridges	Type	Eco Solvent Ink
	Capacity	220ml secondary ink cartridge with 3L ink tank
	Color	4 colors (Cyan, Magenta, Yellow, Black)
Printing Resolution	Maximum 2400 dpi	
Printing Speed	4pass(360x2400dpi)	: 37 sqm/h
	6pass(720x1800dpi)	: 19 sqm/h
	8pass(720x2400dpi)	: 10 sqm/h
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system	
Interface	Ethernet Interface	
Power	8000W	
Power Supply	AC 220V ± 10%, 50/60 HZ	
Dimensions(with stand)	112.6(W)x31.7(D)x60(H) in. (2861(W)x806(D)x1533(H) mm)	
Weight(with stand)	1058.2 lb. (480 kg)	
Package Dimensions	106(W)x31(D)x30.7(H) in. (2700(W)x790(D)x780(H) mm)	
Package Weight	Entirety Packing : 1278.7 lb. (580 kg) Split Packing : 1036.2 lb. (470 kg)	
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15℃ to 32℃] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41 ℉ to 104 ℉ [5℃ to 40℃] / Humidity: 20 to 80% (no condensation)
Accessories	Stand, take-up and discharge device, cold air drying system, large ink supply system, etc.	

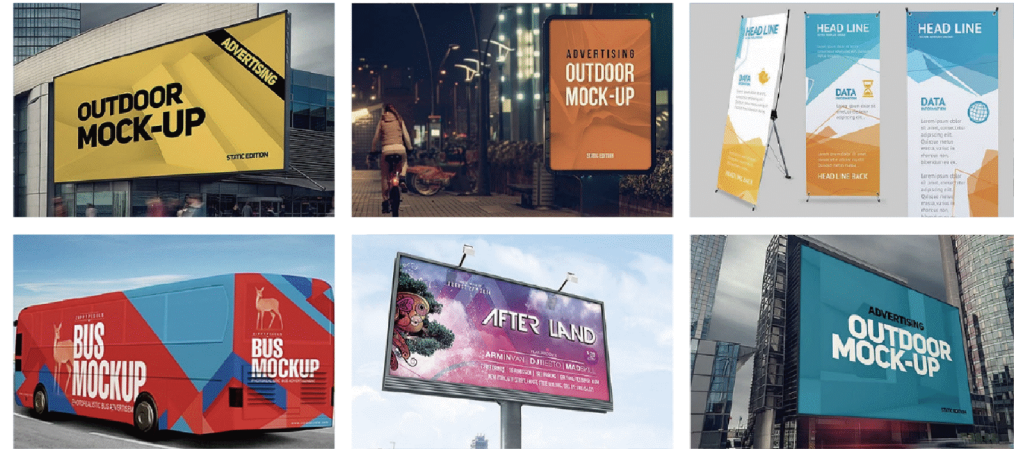

Suitable for PP, photo paper, car sticker, lightbox film, canvas, non-woven fabric, etc




Suction wind system
intelligent dust removal



Head cleaning and moisturizing
makes operation and
maintenance more convenient




Built in temperature and
humidity display



High quality DC servo motor
has good stability and long
service life



THK high-precision
mute rail



Three-foot pinch roller
structure brings more stable
feeding accuracy



Infrared heater and
cooling fan



External power supply,
intelligent rolling system.