

T-shirt Digital Heat Transfer Systems

602/603/604 DTF



* Dual Print Heads Speed

720x1200dpi - 4pass 12 m²/h

720x1800dpi - 6pass 9 m²/h

* Three Print Heads Speed

720x1200dpi - 4pass 12 m²/h

720x1800dpi - 6pass 9 m²/h


* Four Print Heads Speed

720x1200dpi - 4pass 24 m²/h


720x1800dpi - 6pass 18 m²/h




C Customized

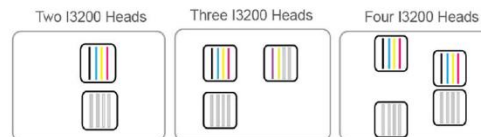

| | | |
|-----------------------|--|----------|
| Model | DTF-A603 | DTF-A604 |
| Printhead | Epson I3200-A1/Epson I1600-A1 | |
| Printhead Quantity | 3 | 4 |
| Printing Color | 4C+Fo+Fm+Fy+Fg+W | CMYK+W |
| Printing Size | 600mm | |
| RIP Software | RIIN/Flexiprint/CADlink/Maintop/NeoStampa | |
| Heating Method | Front and back independent heating | |
| Ink System | Auto ink supply,white ink circulating and stirring | |
| Power Supply | Printer: 110V/220V 350W 50~60HZ Powder Shaker: 220V 3500W 50~60HZ | |
| Work Environment | Temperature:20°C~30°C Humidity:35%~65% | |
| Machine Size/Weight | Printer: 1801*719*1597mm 200kg Powder Shaker: 1008*1010*1082mm 97kg | |
| Packaging Size/Weight | Printer: 1890*740*850mm 213kg Powder Shaker: 940*780*1190mm 116kg | |




Saves freight and space

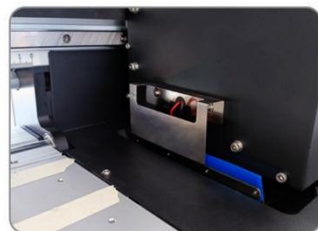

Anti-collision system



3-stage heating zones



Powder auto-recycling device

AIR PURIFIER